


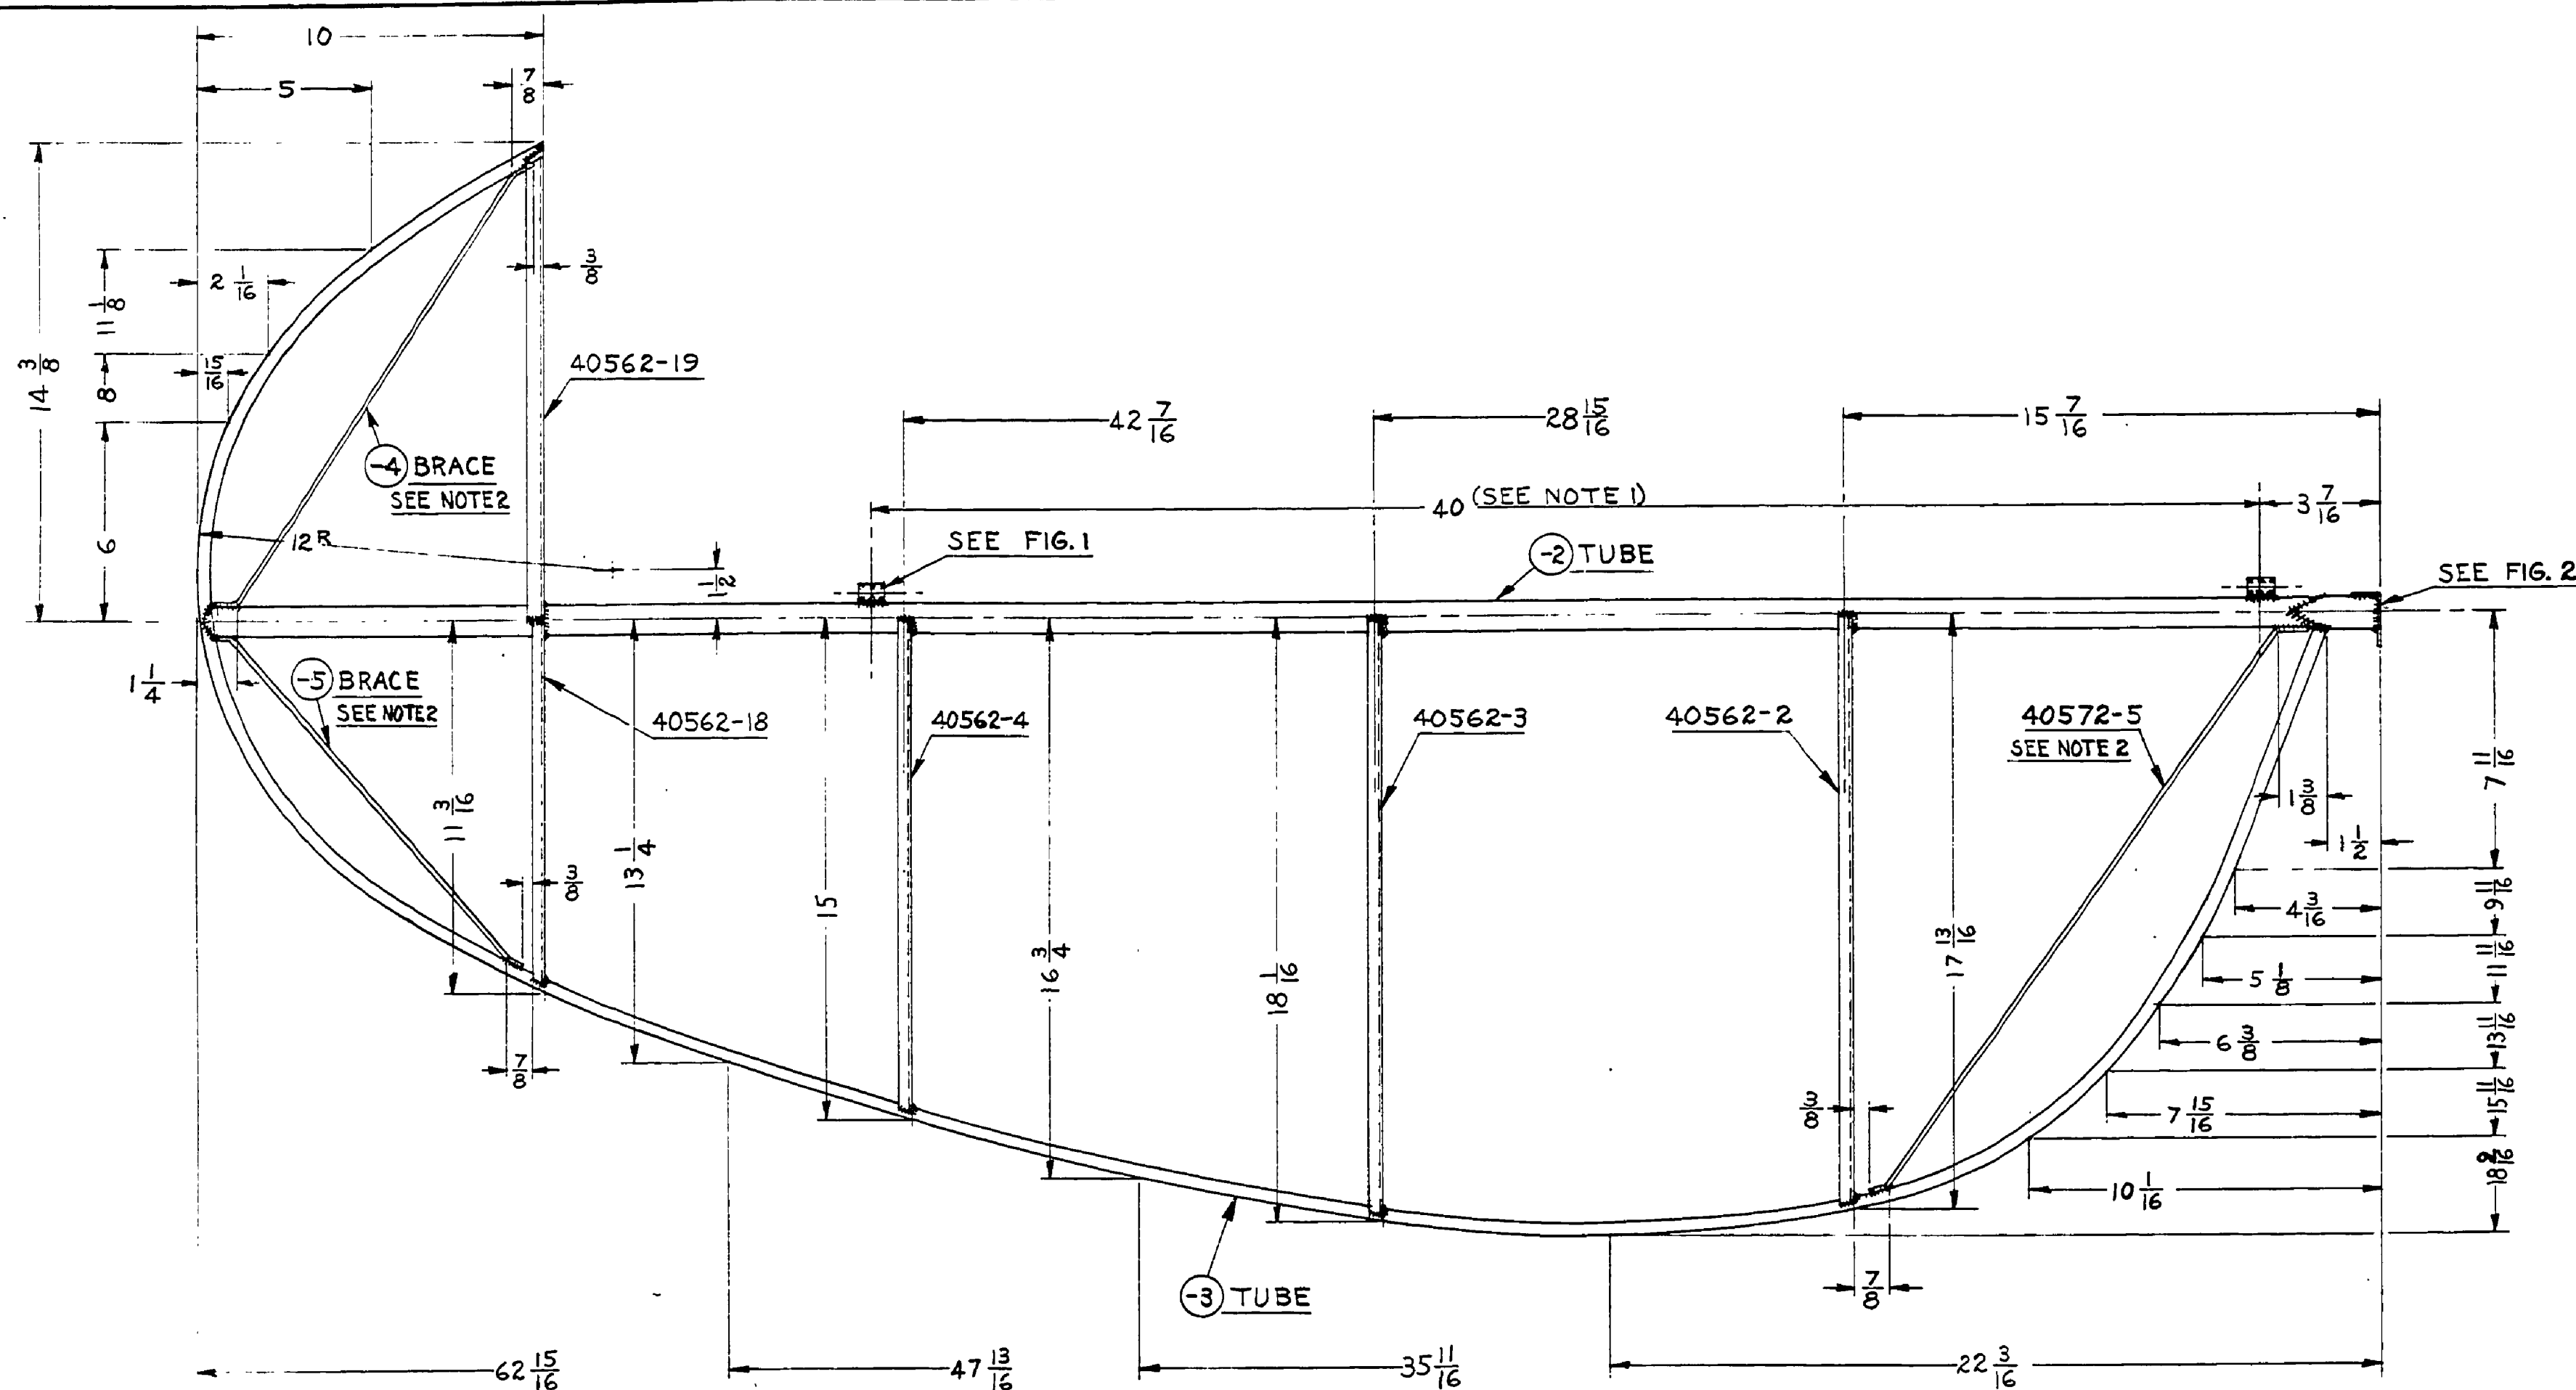

NOTE:
1. HINGE CENTERS TO COINCIDE WITH THOSE ON STABILIZER.
2. BRACES 40572-5, 12770-4 & 12770-5 SHALL BE TAUT

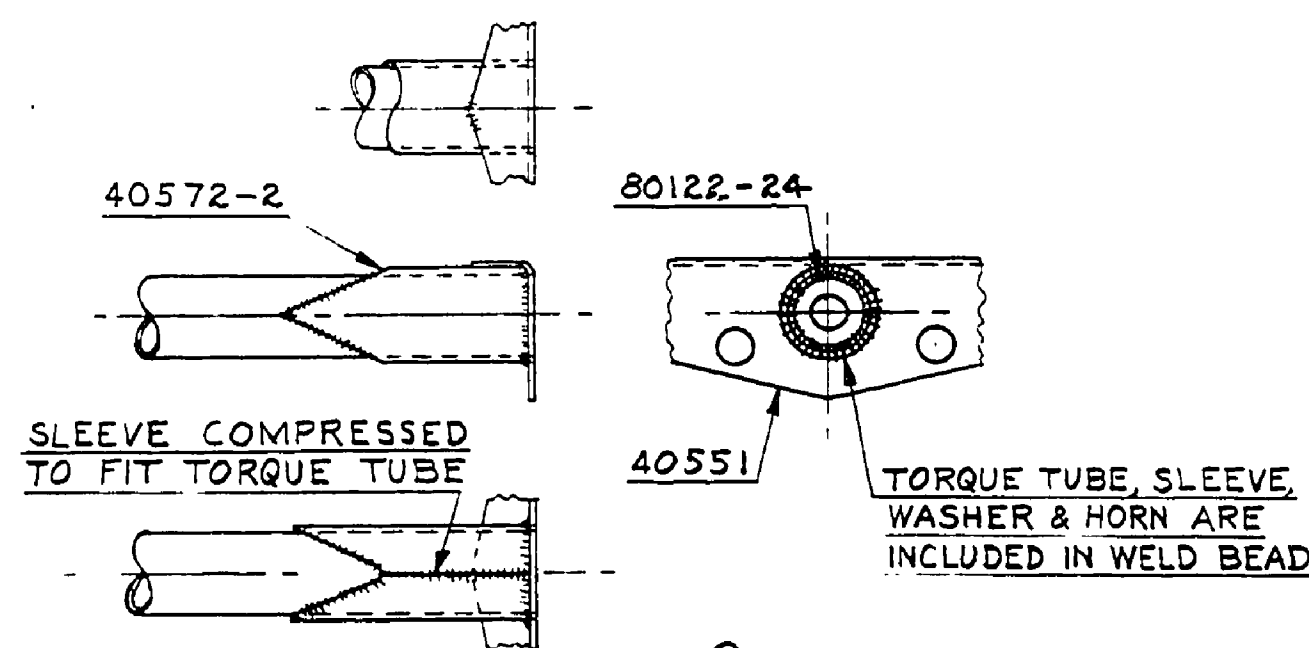


FIG. 2
HORN ATTACHMENT DETAIL
6 IN. = 1 FT.

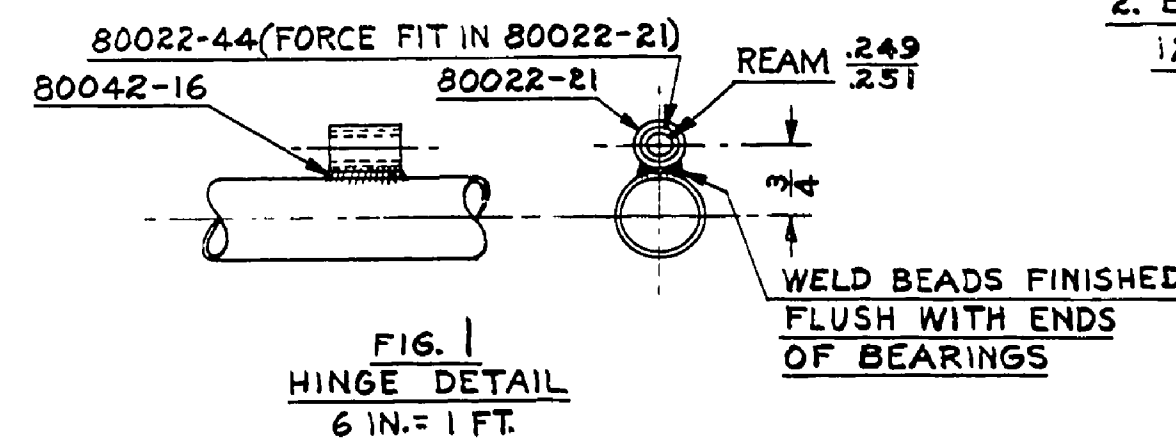


FIG. 1
HINGE DETAIL
6 IN. = 1 FT.

80122-24	1	WASHER	
80042-16	2	PLATE	
80022-44	2	BUSHING	
80022-21	2		
40572-5	1	BRACE	
40572-2	1	SLEEVE	
40562-19	1		
40562-18	1		
40562-4	1	RIB	
40562-3	1		
40562-2	1		
40551	1	HORN	
-5	1	3/32 x 13 1/4	#1010 C.F. STL. WIRE
-4	1	3/32 x 16 1/2	
-3	1	3/8 x .028 x .97	#1025 STL. TUBE
-2	1	3/8 x .049 x .63	#1025 STL. TUBE

PART NO.	QTY.	SIZE	DESCRIPTION
SCALE 3 IN. = 1 FT. & NOTED			TOTAL WT.-LBS.
FINISH-PIPER SPECIFICATION #10			
MANUFACTURING PRACTICES-PIPER SPECIFICATION #9			

ELEVATOR ASSEMBLY

PIPER AIRCRAFT CORP.
LOCK HAVEN, PENNA.

C. E. K. J. C. B.
12-23-49 12-27-49
DRAFTSMAN CHECKER STANDARDS

12770

A765